




CONVEYANCE V-BELT

Example: Ceramic Tile production line

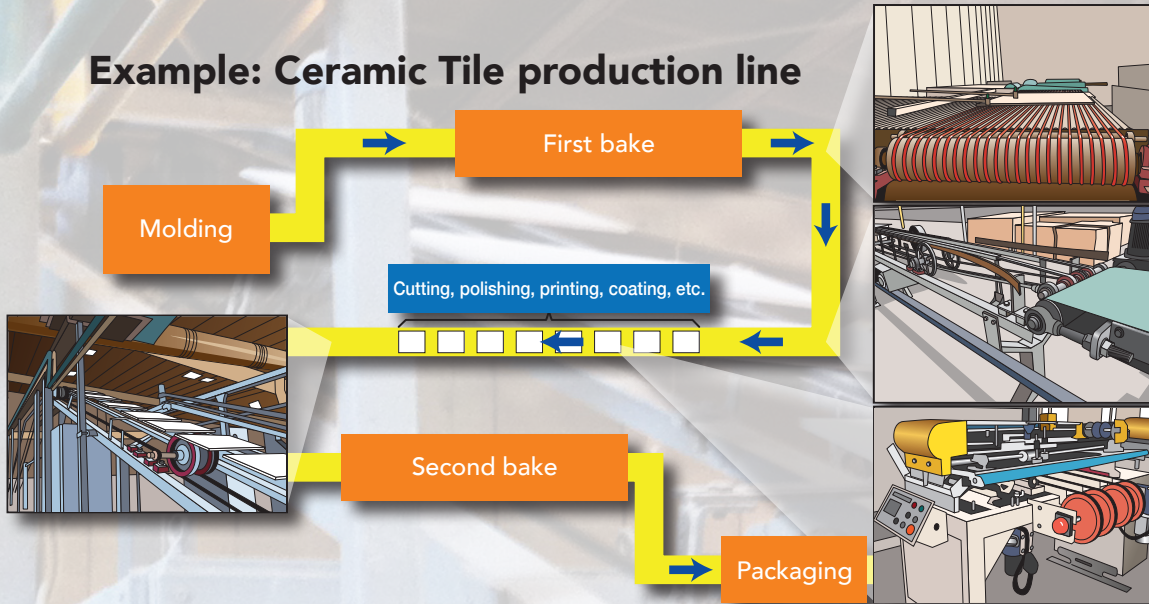

Secures material to convey on the flat backside of belts

Added special rubber material for extended life

No need to replace standard pulleys

PREMIUM QUALITY PRODUCTS

S I N C E 1 9 0 6

Features

Long Life

Thick, abrasion-resistant rubber construction, with more than twice the service life of conventional belts.

Safe

The backside of the belt is flat, to prevent loss of materials when transferred between lines.

Easy


Low cost installation, as existing pulleys may be used.

Applications

In the ceramic tile industry, these belts are ideal for use after the baking process at conveyor transfer points where conventional products have short service life. These belts may also be used in industries where flat items are conveyed on belt backsides.

CAUTION: These belts are not intended for use in power transmission applications.

Comparison

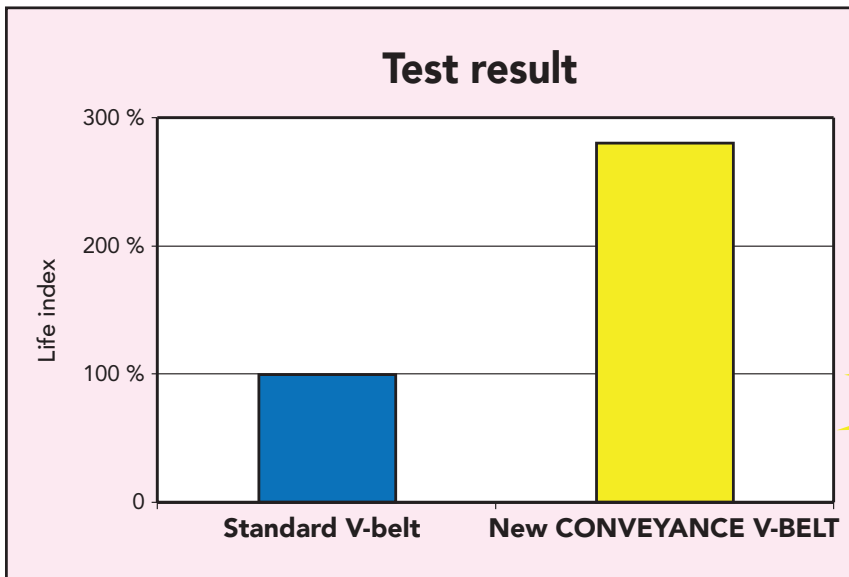

Test Condition

Operating time: 12 - 24 hrs/day

Comparison belt: Standard V-belt

**More than two times
the service life!
(Compared to
Standard V-belt)**

Standard Size Range

B & C section: 80 - 800 inch

* Please contact Bando regarding non-standard size requirements

NOT FOR
TRANSMISSION
NOT FOR
TRANSMISSION
NOT FOR



BANDO CERAMIC CARRY
BANDO CERAMIC CARRY
BANDO CERAMIC CARRY



@BandoUSAInc



BandoUSA.com



800-829-6612



BandoUSA@bandogrp.com

BANDO

BUI 1048/10-19